SYNOPAC
SYNERGY OF PACKAGING

Filling and Capping Systems

Präzise Verlässlichkeit
Precise Dependability

Dosiermaschinen / *Dosing Machines*




W - 200 / W - 300
Die Präzise
The Accurate

W - 200 / W - 300
Dosiermaschine (Wägen und Füllen)

Wo immer 0.3 Gramm Differenz Sicherheit bedeuten wird diese Kombination eingesetzt. Sie tariert sich automatisch vor jedem Füllvorgang und protokolliert jede Abfüllung auf Papierstreifen oder Etiketten.

Die W - 200 / 300 eignet sich für kleinere Serien über die Füllprotokolle für Chargenzertifikate erstellt werden müssen.

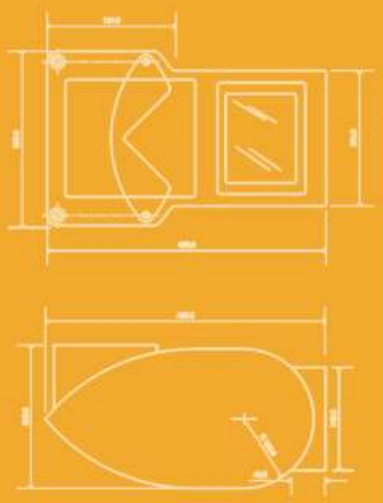


W - 200 / W - 300
Dosing Machine (Weighing and filling)

Where a mere 0.3 grams in variance can make a big difference in safety, this combination has been provenly established. It automatically tears itself off prior to each filling procedure and then records each filling on paper strips or labels.

The W - 200 / 300 is suitable for smaller series for which filling records for certificate of analysis are to be established.

Leistungs-Diagramm auf Wasserbasis / *Performance diagram based on water*

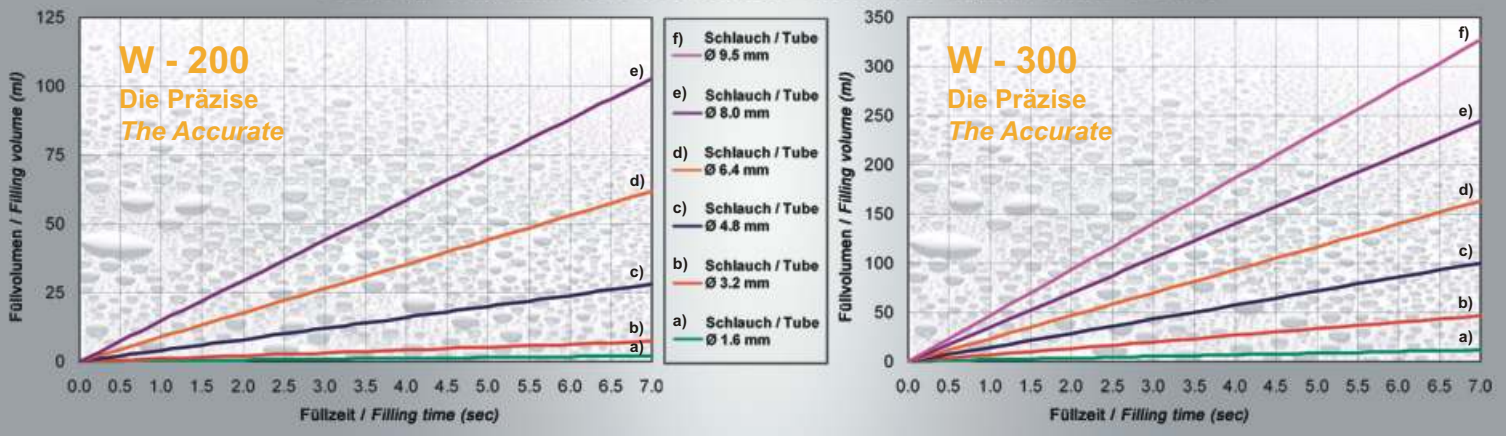

Dosiermaschinen / *Dosing Machines*

Die Eigenschaften und Vorteile

- Dosieren nach Gewicht auf 0.3 g genau
- Universal Formatteile für mehrere Flaschendurchmesser
- Keine Querkontamination
- LCD Display
- Variable Drehzahl
- Geringer Reinigungsaufwand
- Waage kann autonom verwendet werden
- Präzisionswaage 0.1 g Mettler Toledo

The attributes and advantages

- *Dosing per weight, precise up to 0.3 g*
- *universal format parts for various bottle diameters*
- *no cross contamination*
- *LCD display*
- *variable r.p.m. (revolutions per minute)*
- *small cleaning effort*
- *guaranteed drop-free filling*
- *the scale-weighers can be used autonomously*
- *precision scale-weighers 0.1 g Mettler Toledo*



Technische Spezifikation	**W - 200**	**W - 300**	***Technical specification***
Max. Verpackungs- Höhe	*140 mm*	*140 mm*	***max. packaging high***
Min. Verpackungs- Ø	*4 mm*	*4 mm*	***min. packaging Ø***
Max . Verpackungs- Ø	*100 mm*	*100 mm*	***max. packaging Ø***
Füllvolumen	*0.072-880 ml/min*	*0.44-2800 ml/min*	***filling volume***
Genauigkeit	0.3 g	0.3 g	***accuracy***
Leistung ca.	*600 pcs. / h*	*600 pcs. / h*	***capacity approx.***
Netzanschluss	*240 VAC50 Hz*	*240 VAC50 Hz*	***electric supply***
Material	*Aluminium Stainless Steel Acrylglass*	*Aluminium Stainless Steel Acrylglass*	***material***

Technische Änderungen vorbehalten

Technical changes reserved

Ihr Agent / *Your Agency*

SYNOPAC
SYNERGY OF PACKAGING

SYNOPAC AG
Langenhagstrasse 3
CH-4147 Aesch
Tel +41 (0) 61 756 99 70
Fax +41 (0) 61 756 99 79
info@synopac.ch
www.synopac.ch