SYNOPAC
SYNERGY OF PACKAGING

Filling and Capping Systems



Leistungsstarkes Durchhalten
Powerfull Stand the Cours

Vollautomaten / *Fully Automatic Machines*




FS - 655
Die Ausdauernde
The Persevered

FS - 655
Vollautomatische Abfüll- und Verschliessmaschine

Mit einer Leistung von bis zu 2'000 Flaschen pro Stunde, regelmässig über den ganzen Tag, stellt sie ihre Ausdauer unter Beweis. Die Maschinenelemente sind auf speziell geformten Stelzen montiert, wodurch eine schnelle und effiziente Reinigung möglich wird.

Ob als platzsparende Winkelform oder in Linie gebaut, die FS - 655 bringt Ihnen den gewünschten Erfolg.

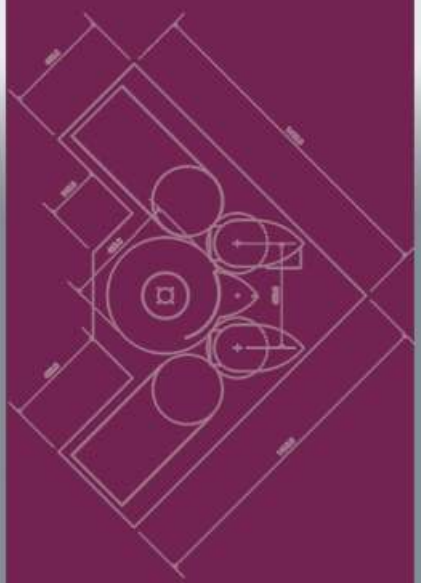


FS - 655
Full Automatic Filling and Capping Machine

With a performance of up to 2'000 bottles per hour – all day long – this machine gives evidence of the persistence. The elements are set upon specially formed stilts which enables a fast and efficient cleaning.

Either as space-saving angular format or constructed in line, the FS - 655 leads you to the desired success.

Leistungs-Diagramm auf Wasserbasis / *Performance diagram based on water*

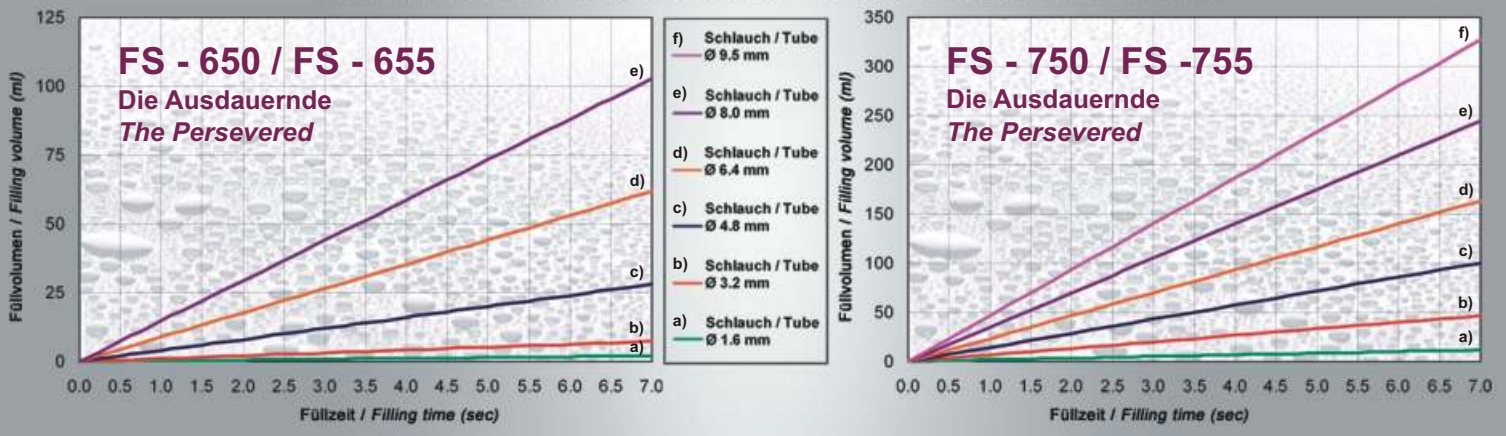

Vollautomaten / *Fully Automatic Machines*

Die Eigenschaften und Vorteile

- Formatwechsel innert 10 Minuten
- Einfache Reinigung
- Unterspiegelabfüllung (FS - 655)
- Keine Quer-Kontamination
- LCD Display
- Variable Drehzahl
- 4 Speicherplätze
- Garantiert tropffreie Abfüllung
- Produktewechsel innert wenigen Minuten
- Verschliessmodul ist pneumatisch betrieben
- Schraubermotor mit Andruckstart, sowie links/rechts Umstellung
- Schraubkopf, ohne Verwendung von Werkzeugen, schnell und einfach auswechselbar
- Drehmoment stufenlos einstellbar



The attributes and advantages

- *change of format within 10 minutes*
- *easy cleaning*
- *filling beneath liquid level* (FS - 655)
- *no cross contamination*
- *LCD display*
- *4 memory possibilities*
- *variable r.p.m. (revolutions per minute)*
- *guaranteed drop-free filling*
- *change of product within few minutes*
- *locking module pneumatically operated*
- *screwing unit with pressing start and left/right shifting*
- *screwing head fast and easy changeable without use of tools*
- *infinitely variable torque*

Technische Spezifikation	**FS - 650**	**FS - 655**	**FS - 750**	**FS - 755**	***Technical specification***
Max. Verpackungs- Höhe	*140 mm*	*140 mm*	*280 mm*	*280 mm*	***max. packaging high***
Min. Verpackungs- Ø	*15 mm*	*15 mm*	*15 mm*	*15 mm*	***min. packaging Ø***
Max . Verpackungs- Ø	*100 mm*	*100 mm*	*100 mm*	*100 mm*	***max. packaging Ø***
Füllvolumen	*0.072-880 ml/min*	*0.072-880 ml/min*	*0.44-2800 ml/min*	*0.44-2800 ml/min*	***filling volume***
Genauigkeit	*± 0.5 %*	*± 0.5 %*	*± 0.5 %*	*± 0.5 %*	***accuracy***
Unterspiegelabfüllung	Nein / *No*	Ja / *Yes*	Nein / *No*	Ja / *Yes*	***bottom up filling***
Min. Drehmoment	*0.5 Nm*	*0.5 Nm*	*0.5 Nm*	*0.5 Nm*	***min. torque***
Max. Drehmoment	*3.0 Nm*	*3.0 Nm*	*3.0 Nm*	*3.0 Nm*	***max. torque***
Leistung ca.	*2'000 pcs. / h*	*2'000 pcs. / h*	*2'000 pcs. / h*	*2'000 pcs. / h*	***capacity approx.***
Netzanschluss	*240 VAC50 Hz*	*240 VAC50 Hz*	*240 VAC50 Hz*	*240 VAC50 Hz*	***electric supply***
Luftdruck	*4-8 bar*	*4-8 bar*	*4-8 bar*	*4-8 bar*	***air pressure***
Material	*Aluminium Stainless Steel Acrylglass*	*Aluminium Stainless Steel Acrylglass*	*Aluminium Stainless Steel Acrylglass*	*Aluminium Stainless Steel Acrylglass*	***material***

Technische Änderungen vorbehalten — *Technical changes reserved*

Ihr Agent / *Your Agency*

SYNOPAC
SYNERGY OF PACKAGING

SYNOPAC AG
Langenhagstrasse 3
CH-4147 Aesch
Tel +41 (0) 61 756 99 70
Fax +41 (0) 61 756 99 79
info@synopac.ch
www.synopac.ch